




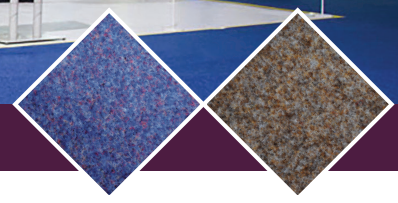
# W WELLINGTON VELOUR







FIBRE BONDED RANGE


 **MADE IN THE UK. MADE TO LAST.**

## Specification

<b>PRODUCT</b>	Wellington Velour Heavy Contract Carpet and Tiles
<b>FIBRE CONSTRUCTION</b>	90% Polypropylene, 10% Recycled Polyester
<b>WEIGHT</b>	1180gsm (Sheet), 3830gsm (Tile)
<b>THICKNESS</b>	10mm (Sheet), 10.8mm (Tile)
<b>ROLL WIDTH</b>	 2 metre
<b>TILE SIZE</b>	 50cm x 50cm (Tiles are Bitumen backed)
<b>TILES PER BOX</b>	16 (4m <sup>2</sup> )
<b>COLOUR FASTNESS</b>	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:X12) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5
<b>FLAMMABILITY</b>	(BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
<b>BS EN 13501</b>	Class Efl (Sheet) Class Bfl-s1 (Tile)
<b>REDUCTION IN IMPACT NOISE</b>	BS EN ISO 140-8: 24dB (Sheet)
<b>SOUND ABSORPTION - BS EN 354:2003</b>	BS EN ISO 11654:1997: Class E (aw = 0.25) (Sheet)
<b>ANTISTATIC</b>	Suitable for use in computer rooms
<b>INSTALLATION</b>	 Wellington Velour tiles should be laid tessellated as per the icon provided. The method of installation should conform to BS5325. For details of subfloor preparation and a full guide to installation visit: <a href="http://www.heckmondwike-fb.co.uk">www.heckmondwike-fb.co.uk</a> . Before laying Wellington Velour, tiles should be allowed to condition for 24 hours at the expected temperature and humidity levels.
<b>ADHESIVE GUIDE</b>	Sheet carpet should be fully adhered with F. Ball F3 or Bostik Laybond Carpet Adhesive. For tiles use F. Ball F41 Tackifier or Bostik Laybond Carpet Tile Tackifier.
<b>MAINTENANCE</b>	To achieve maximum life expectancy it is essential to initiate a maintenance schedule from the date of installation. A full guide to cleaning & maintenance is available at: <a href="http://www.heckmondwike-fb.co.uk">www.heckmondwike-fb.co.uk</a>



 EN 14041 Heckmondwike FB Liversedge WF15 7FH 13 Wellington Velour Sheet Fibre Bonded Sheet Floorcovering Intended for internal use  	 EN 14041 Heckmondwike FB Liversedge WF15 7FH 09 Wellington Velour Tile Fibre Bonded Tile Floorcovering Intended for internal use  
--	--



 ISO 9001 Quality Management Systems CERTIFIED	 ISO 14001 Environmental Management CERTIFIED
--	--

 CONTRACT FLOORING ASSOCIATION	 10 YEAR WARRANTY
---	---

 **NBS Source**  
PARTNER

PLEASE NOTE: For technical reasons, as with all textile materials, it is not possible to colour match from different batches. Orders that need to colour match should be placed at the same time. Production may, therefore, show variations to the sample card. Heckmondwike reserves the right to change or modify product specifications without giving prior notice.