

LUXURY VINYL FLOORING

by lifestyle FLOORS

Xtreme





Silk Oak 109S



Lime Oak 976M



Golden Oak 696L



Golden Oak 690L



Havanna Oak 662M



Havanna Oak 602M




Havanna Oak 694M



Natural Oak 369M



Pure Oak 946E

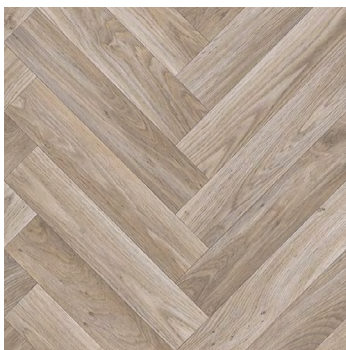

Oak Chevron 913M




Mira 190L




Mira 116L




Mira 160L




Mira 909L

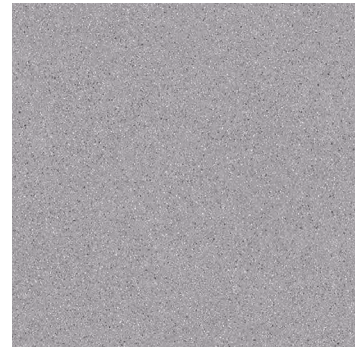


Mira 970M




Mira 690D




Mira 990D

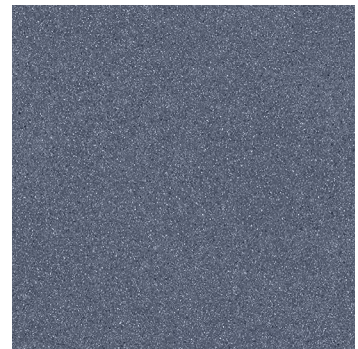

Mira 790D



Mira 770M



Mira 707M

Xtreme - Technical information

Domestic wear warranty		Lifetime
Commercial wear warranty		10 years
Classification	ISO 10874	Class 23 (heavy domestic) Class 34 (very heavy commercial) Class 43 (heavy industrial)
Thickness	EN ISO 24346	2mm
Wear layer	EN ISO 24340	0.7mm
Abrasion group	EN 660-2	T
Total weight	EN ISO 23997	2800 g/m ²
Roll widths	EN ISO 24341	2, 3 & 4m
Standard roll length	EN ISO 24341	22m (approx.)
Slip resistance	EN 13893	≥ 0.60 (DS)
Slip resistance (ramp test with oil)	DIN 51130	R10
Reaction to fire	EN 13501-1	Bfl-s1
Impact sound improvement	EN ISO 717/2	ΔLw 6 dB
Static electrical propensity	EN 1815	< 2kV on concrete
Dimensional stability	EN ISO 23999	≤ 0.40%
Curling	EN ISO 23999	≤ 8mm
Residual indentation	EN ISO 24343-1	≤ 0.10mm
Underfloor heating	EN 12667	Suitable
Thermal resistance	ISO 8302	0.014 m ² K/W
Thermal conductivity	EN 12524	0.14 W/m.K
Light stability	ISO 105-B02	≥ 6°
Chemical resistance	ISO 26987	Resistant
Antibacterial test	EN ISO 846	Yes
Antibacterial properties	ISO 22196	Bacteria Shield+

