

Aspire - Plank

Luxury Vinyl Tile

Name	Standard	click result	dry back result
DIMENSIONS			
Thickness	EN 429	5.5mm	2.5mm
Length	EN 428	121.92cm	121.92cm
Width	EN 428	18.42cm	18.42cm
Weight	EN 430	8100 g/m ²	4630 g/m ²
Bevel		4V	4V
TEST			
Anti-static Performance	EN 1815	< 2.05kV	< 2.0kV
Impact Sound Insulation	EN 492-09	IIC=55	ICC=63
Sound Absorption	ISO 717-2	20dB	5dB
Thermal Resistance	BS 4745:2005 (2016) ISO 5085-1: 1989	Tog: 0.52	Tog: 0.15
Dynamic Friction	BS EN 13893:2002 (2018)	0.0417m ² K/W	0.0107m ² K/W
Flammability	BS EN 13501-1:2007 + A1:2009	B _{fl} - s1	B _{fl} - s1
Castor Chair Resistance	EN 12529	Yes Type W	Yes Type W
Slip Resistance	DIN 51130	Class R9 DS	Class R10
Usage Classification	EN 685	23 - Heavy Domestic 33 - Heavy Commercial Use 41 - Light Industrial Use	
Chemical Resistance	EN 423	Not affected	
Wear Group	EN 660-1	T	
Residual Indentation	EN 433	0.05mm	
Light Stability	EN ISO 105-B02	Degree Level ≥ 6 Method A	
Dimensional Stability	EN 434	≤ 0.1%	≤ 0.12%
CE Mark	EN14041	EN 14041:2001+AC:2005+AC:2006	
Underfloor Heating	EN1264-2	Suitable for underfloor heating. Maximum temperature 27°C	
Phthalate Free	Our products are manufactured using both phthalate free and biobased plasticisers except for recycled content		



Aspire - Plank

Luxury Vinyl Tile



▲ 02 - Bleached Oak



▲ 01 - Fossil Oak



▲ 02 - Bleached Oak



▲ 03 - Smithy O



▲ 04 - Charred Oak



▲ 05 - Artisan Oak



▲ 06 - Smokehouse Oak




▲ 07 - Classical Oak



▲ 08 - Warm Oak



▲ 09 - Natural Oak

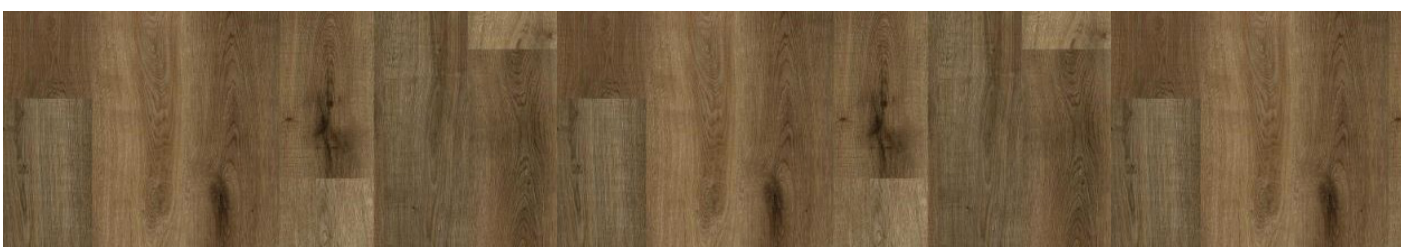

▲ 10 - Country Oak