

Essence 30/55

Green Building Card

SUSTAINABILITY ATTRIBUTES

Circular Economy and Climate Change



Good Materials




INDOOR AIR QUALITY



This product's installation waste is recyclable in our recycling centres
LCA Information above is based on the product's Environmental Product Declaration (EPD)
EPD Number : IES 0015802
EPD comparison should be conducted by experts only

LIFE CYCLE ASSESSMENT

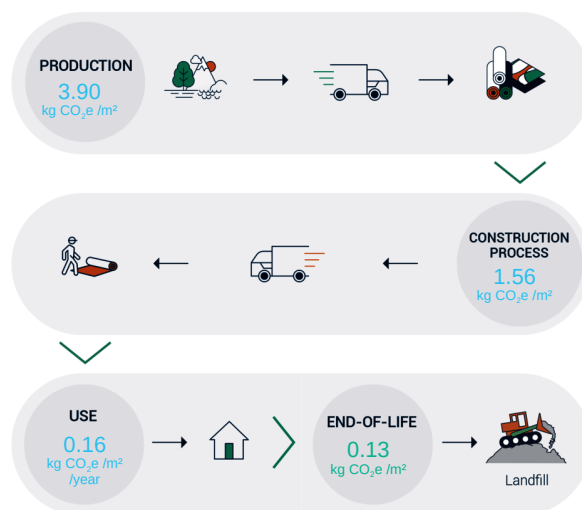

TOTAL CARBON FOOTPRINT 5.74 kg CO₂e /m²

Product life span = 25 years



CONTRIBUTION TO GREEN BUILDING CERTIFICATIONS

BREEAM®

BREEAM INTERNATIONAL NEW CONSTRUCTION 2016

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
HEA 01 - Visual Comfort	Best practices in daylighting and artificial lighting design No specific requirement at product level	 VISUAL COMFORT
MAT 01 - Life Cycle Impacts	EPDs available	
MAT 06 - Material Efficiency	Ingredients verified by a third party or Product composed of recycled content	

LEED v4.1 Building Design and Construction

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
MR - Environmental Product Declarations	EPDs available	
MR - Sourcing of Raw Materials	Signatory of the UN Global Compact or Product composed of recycled content or Recyclable at end-of-life or Bio-sourced materials	
MR - Material Ingredients	Ingredients verified by a third party or Cradle to Cradle® certification at bronze level or higher	
EQ - Interior Lighting and Daylight	Best practices in daylighting and artificial lighting design No specific requirement at product level	 VISUAL COMFORT

CONTRIBUTION TO GREEN BUILDING CERTIFICATIONS



WELL BUILDING STANDARD v2

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
L02 - Visual Lighting Design and L 06 - Daylight Simulation	Best practices in daylighting and artificial lighting design No specific requirement at product level	VISUAL COMFORT
S07 - Impact Noise Management	Best practices in impact noise reduction No specific requirement at product level	3dB IMPACT NOISE REDUCTION
X01, X02 and X05 - Material Restrictions, Interior Hazardous Materials Management and Enhanced Material Restrictions	Asbestos 1000 ppm Halogenated flame retardants 100 ppm PFAS 100 ppm Lead 100 ppm Cadmium 100 ppm Mercury 100 ppm Orthophthalates 100 ppm Higher amounts are allowed if required by local code	MHS OF 2014 MATERIAL · HEALTH · STATEMENT Verify compliance according to chemicals displayed in MHS. Evaluation threshold at least 100 ppm (0.01%) of the final product.
X07 - Materials Transparency	Ingredients verified by a third party or Cradle to Cradle® certification at bronze level or higher	MHS OF 2014 MATERIAL · HEALTH · STATEMENT
X08 - Materials Optimization	Ingredients verified by a third party or Cradle to Cradle® certification at silver level or higher	MHS OF 2014 MATERIAL · HEALTH · STATEMENT

SKA RATING OFFICES 1.2

SKArating®

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Soft flooring	Recycled content > 50% or Renewable or natural content > 50% or Cradle to Cradle® certification at silver level or higher or EPDs available	EPD®
Low VOC finishes	TVOC at 28 days ≤ 100 µg/m³ and Formaldehyde at 28 days ≤ 10 µg/m³ or Ingredient disclosure	MHS OF 2014 MATERIAL · HEALTH · STATEMENT VOC ≤ 10 µg/m³ OPTIMAL INDOOR AIR QUALITY
Daylighting	Best practices in daylighting design No specific requirement at product level	VISUAL COMFORT

HOME QUALITY MARK

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
4.2 Daylight	Best practices in daylighting and artificial lighting design No specific requirement at product level	 VISUAL COMFORT
4.4 Sound Isolation	Best practices in impact noise reduction No specific requiremen at product level	 3dB IMPACT NOISE REDUCTION
6.1 Responsible Sourcing	Ingredients verified by a third party or Product composed of recycled content and ISO 14001 certified	 MHS MATERIAL · HEALTH · STATEMENT  31% RECYCLED CONTENT
6.2 Environmental Impact of Materials	EPD available	 EPD®